



# MAYTAG® COMMERCIAL ON-PREMISES DRYING TUMBLERS

## MDG30/50/75MNV



### GET LAUNDRY DONE FASTER

The big-load capacity of Maytag® on-premises drying tumblers helps you save time and energy costs by drying more laundry at once. Plus, the extra-large door opening makes loading and unloading easy.



### MECHANICAL CONTROLS

Dual timer controls let you set drying and cool-down times separately, while the push-button rocker switch makes it easy to choose the correct temperature.

### FOR YOUR OPERATION:

- Simple Push-To-Start Switch For Safety
- In-Use Indicator Light
- Dual Timers Show Drying And Cool-Down Times
- Extra-Large Door Opening
- Extra-Large Lint Compartment
- Easy-Access Design For Convenient Self-Service
- Available In 30-, 50- And 75-Pound Capacities

### BUILT-TO-LAST™ FEATURES:

- Sealed Bearings Never Need Lubrication
- Heavy-Duty Motor



Model MDG30MNV

Model MDG50MNV


**DIAL CONTROLS ARE  
EASY FOR  
ANYONE  
TO OPERATE.**

LAUNDRY SOLUTIONS YOU CAN *DEPEND ON.*

CLP611

## On-Premises Drying Tumblers — MECHANICAL CONTROL

Available In 30-, 50- And 75-Pound Capacities

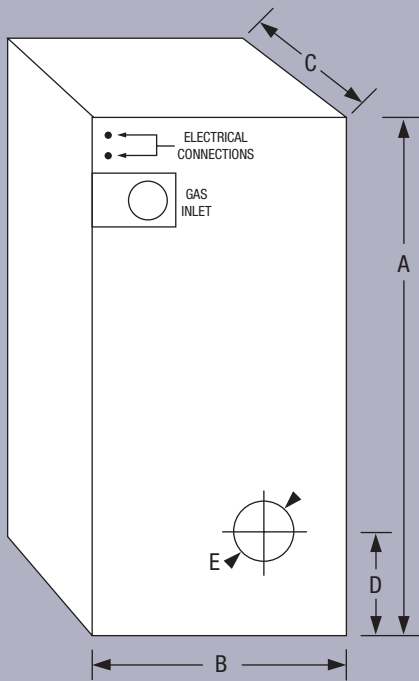

### MAYTAG® LIMITED WARRANTY

### 2 YEARS — ALL PARTS

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.



#### Multi-Load Dryers

#### DRYER SPECIFICATIONS

MODELS	MDG30MNV	MDG50MNV	MDG75MNV
<b>TUMBLER</b>			
Capacity — lbs. (kg)	30 (13.6)	50 (22.7)	75 (34)
Capacity — cu. ft. (cu. m)	12.5 (.354)	18.3 (.518)	22.4 (.634)
Diameter — in. (cm)	32 <sup>3</sup> / <sub>4</sub> (83.2)	32 <sup>3</sup> / <sub>4</sub> (83.2)	37 (94.0)
Depth — in. (cm)	25 <sup>5</sup> / <sub>8</sub> (65.1)	37 <sup>1</sup> / <sub>2</sub> (95.3)	36 (91.4)
<b>DRIVE MOTOR</b>			
HP (kw)	1/2 (.373)	3/4 (.560)	1 (.746)
<b>AIRFLOW</b>			
Cfm (cmm)	600 (17)	750 (21.2)	1,000 (28.3)
<b>HEAT INPUT</b>			
BTU/hr. (kcal/hr.)	90,000 (22,680)	150,000 (37,800)	175,000 (44,100)
<b>GAS INLET</b>			
In. (cm)	1/2 (1.3)	1/2 (1.3)	3/4 (1.9)
<b>VOLTAGE/BREAKER SIZE — amps</b>			
208V/3 PH (3-wire + ground)	20	20	20
<b>COLOR</b>			
White	•	•	•
<b>APPROXIMATE WEIGHT</b>			
Crated — lbs. (kg)	571 (259)	700 (317.5)	771 (349.7)
Uncrated — lbs. (kg)	534 (242.2)	651 (295.3)	721 (327)
<b>DIMENSIONS</b>			
A) Height — in. (cm)	72 (182.9)	72 (182.9)	75 <sup>1</sup> / <sub>8</sub> (190.8)
B) Width — in. (cm)	34 <sup>1</sup> / <sub>4</sub> (87)	34 <sup>1</sup> / <sub>4</sub> (87)	38 <sup>1</sup> / <sub>4</sub> (97.2)
C) Depth including door handle — in. (cm)	38 (96.5)	49 <sup>5</sup> / <sub>8</sub> (126)	48 <sup>1</sup> / <sub>2</sub> (123.2)
D) Floor to center of exhaust — in. (cm)	10 <sup>1</sup> / <sub>2</sub> (26.7)	10 <sup>1</sup> / <sub>2</sub> (26.7)	18 <sup>1</sup> / <sub>4</sub> (46.4)
E) Exhaust diameter — in. (cm)	8 (20.3)	8 (20.3)*	8 (20.3)**
Door opening — in. (cm)	21 <sup>1</sup> / <sub>2</sub> (54.6)	21 <sup>1</sup> / <sub>2</sub> (54.6)	21 <sup>1</sup> / <sub>2</sub> (54.6)

\* Requires 8" (20.3 cm) material if venting horizontally; 10" (25.4 cm) if venting vertically.  
 \*\* Requires 10" (25.4 cm) material if venting horizontally; 12" (30.5 cm) if venting vertically.  
 An 8" – 10" (20.3 – 25.4 cm) transition must be used.

See specific instructions for proper installation.  
 Because of continuous product improvement, Maytag reserves the right to change specifications without notice.



NEW YORK CITY  
M.E.A.

