



LAUNDRY SOLUTIONS
YOU CAN *DEPEND* ON.


MAYTAG® COMMERCIAL ENERGY ADVANTAGE™ MULTI-LOAD DRYER

MORE ENERGY-SAVING SOLUTIONS THAN ANY OTHER BRAND

Maytag built the first appliance ever to receive the ENERGY STAR® label. Today we offer more high-efficiency laundry appliances than any other brand — from energy-efficient dryers to highly efficient ENERGY STAR®-qualified washers — to help you save money and build profits.

UPDATED CONTROLS

Includes Maytag® Accu Trac® audit system that uses a PDA to communicate with the microprocessor controls — so you can set up, monitor and audit your equipment in seconds.

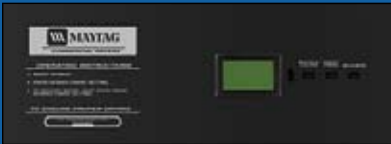

FOR YOUR CUSTOMERS:

- Large 50 and 75-Pound Capacities
Hold More Laundry At Once
- Fast-Drying Axial Airflow System
- Extra-Large Door Opening
- Digital Display Shows Time Remaining In Cycle

FOR YOUR OPERATION:

- Lowest-BTU Dryer On The Market
- Improved Insulation For Greater Efficiency
- Accu Trac® Audit System With Two-Way Data Communications
- Front Access For Easy Service
- Extra-Large Lint Compartment
- Factory-Installed Risers


BUILT-TO-LAST™ FEATURES:

- Heavy-Duty Motor
- Permanently Lubricated Bearings
- The Best Warranty In The Business — 5 Years On All Parts

MDG51/77PD



MAYTAG'S
MOST EFFICIENT
MULTI-LOAD DRYER.

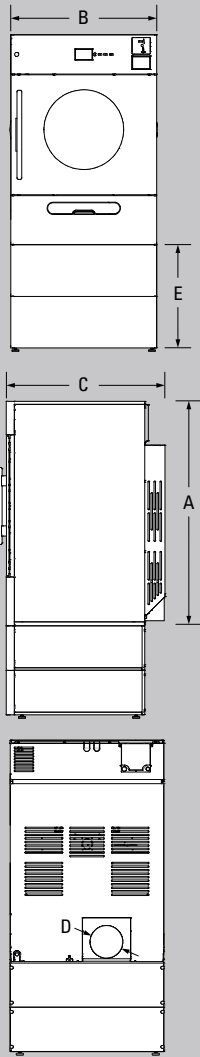

Dimensions will vary according to adjustment of leveling legs; add 1/2" (1.3 cm) minimum.

Maytag® Energy Advantage™ Multi-Load Dryer

MICROPROCESSOR COIN-DROP

	Energy Advantage™ Multi-Load Dryer	
DRYER SPECIFICATIONS		
MODEL	MDG51PD	MDG77PD
CAPACITY		
Lbs. (kg)	50 (22.7)	75 (34)
Cu. ft. (cu. m)	16.17 (.457)	22.2 (.628)
TUMBLER		
Diameter — in. (cm)	37 (93.9)	37 (93.9)
Depth — in. (cm)	26 (66)	35 5/8 (90.5)
MOTOR		
HP (kw) Drive Motor	1 (.746)	1 (.746) Reversible
AIRFLOW		
Cfm (cmm)	525 (14.8)	560 (15.8)
HEAT INPUT		
BTU/hr. (kcal/hr.)	90,000 (22,680)	110,000 (27,718)
GAS INLET		
In. M.N.P.T.	1/2	1/2
VOLTAGE/BREAKER/FUSE REQUIREMENTS		
Voltage	120	120
Amps	20	20
COLOR		
White	•	•
Stainless Steel	•	•
APPROXIMATE WEIGHT		
Crated — lbs. (kg)	691 (313.4)	776 (352)
Uncrated — lbs. (kg)	671 (304.4)	756 (343)
DIMENSIONS		
A) Height not including legs — in. (cm)	55 1/2 (140.9)	55 1/2 (140.9)
B) Width — in. (cm)	38 1/4 (97.2)	38 1/4 (97.2)
C) Depth not including door handle — in. (cm)	39 1/4 (99.7)	48 15/16 (124.3)
D) Exhaust diameter — in. (cm)	8 (20.3)*	8 (20.3)*
E) Riser Height — in. (cm)	22 (55.88)	22 (55.88)
Door opening — in. (cm)	27 3/8 (69.5)	27 3/8 (69.5)
* Requires 8" (20.3 cm) material if venting horizontally; 10" (25.4 cm) if venting vertically.		
See specific instructions for proper installation.		
Because of continuous product improvement, Maytag reserves the right to change specifications without notice.		



5 YEARS — ALL PARTS

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.



NEW YORK CITY
M.E.A.

